

INSTALLATION PROCEDURE



Wabo®CompressionSeal Bridge Series Preformed Elastomeric Joint Seal for Bridge & Highway Applications

A. General

The work shall consist of furnishing and installing a Wabo®CompressionSeal bridge series joint seal in accordance with the details shown on the plans and the requirements of the specifications. Placement of the Wabo®CompressionSeal joint seal shall consist of proper surface preparations, material and application of materials. The Wabo®CompressionSeal joint seal shall be shipped in the longest practical continuous length. Wabo®PrimaLub lubricant adhesive will be shipped in manufacturers labeled containers. Seals shall be cut to length on jobsite where required. Miter cut or bend seal (depending on size) in the field to conform to directional changes.

B. Joint Preparation

Saw cutting of the joint opening is the preferred method of preparation. For formed joints, forming materials should be carefully removed to avoid edge spalling of the concrete. Joint gap edges should be chamfered to help prevent small fractures and spalling. Edge spalling conditions should be repaired and allowed to properly cure prior to installation of the Wabo®CompressionSeal. Repairs shall be made as directed by the Engineer.

The concrete sidewalls must be sound and free of all contaminants such as grease, oil, form release agents, etc., prior to installation of the Wabo®CompressionSeal.

The preferred method of surface preparation to produce laitence-free, roughened sidewalls is where abrasive blasting is not permitted; disc grinding should be employed. Care should be taken to insure a coarse disc is used; so as to produce an abraded surface. The gap openings should be blown out with clean air to remove dust.

Installation must be performed in joint gap openings with sound, clean and dry substrates. Any loose portion of concrete at the gap must be removed and the concrete properly repaired as directed by the engineer.

INSTALLATION PROCEDURE




Wabo® Compression Seal Bridge Series Preformed Elastomeric Joint Seal for Bridge & Highway Applications

D. Seal Placement

Prior to installation, the profile shall be uncoiled from shipment packaging and allowed to reach a relaxed condition. The Wabo® Compression Seal profile shall be cut to the correct length for installation. Care should be taken to extend the profile to its full length, without exerting any tension.

Apply the lubricant adhesive to the inside of the joint gap to a sufficient depth. The profile should then be inserted into the joint gap positioning seal to the proper depth.

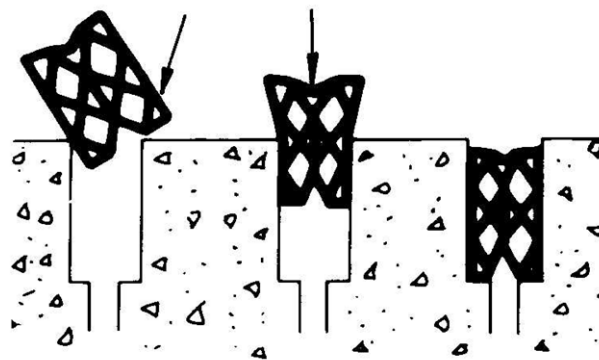

INSTALLING SEAL IN EXPANSION JOINT

E. Splice Procedure

Clean surfaces to be bonded of any dust, talc or other residue with an approved solvent. Ensure that the surfaces to be bonded together are both smooth so that full bearing contact can be achieved.




INSTALLATION PROCEDURE



Wabo® Compression Seal Bridge Series Preformed Elastomeric Joint Seal for Bridge & Highway Applications

The bond at the splice location is achieved with a cyanoacrylate adhesive, which polymerizes on contact and produces a neoprene-to-neoprene bond with a minimum strength of 400 psi. To only one bonding surface, apply a conservative bead of adhesive to all webs of seal. Note that too much adhesive will inhibit the bonding ability.



Immediately after the adhesive is applied, carefully align the seal to bonding surfaces and force together with an even pressure.

