


FIELD-APPLIED SILICONE CORNER BEAD
AND SILICONE SEALANT BAND FORCED DOWN
ALONG SIDE OF BEJS AS
SHOWN - BOTH SIDES

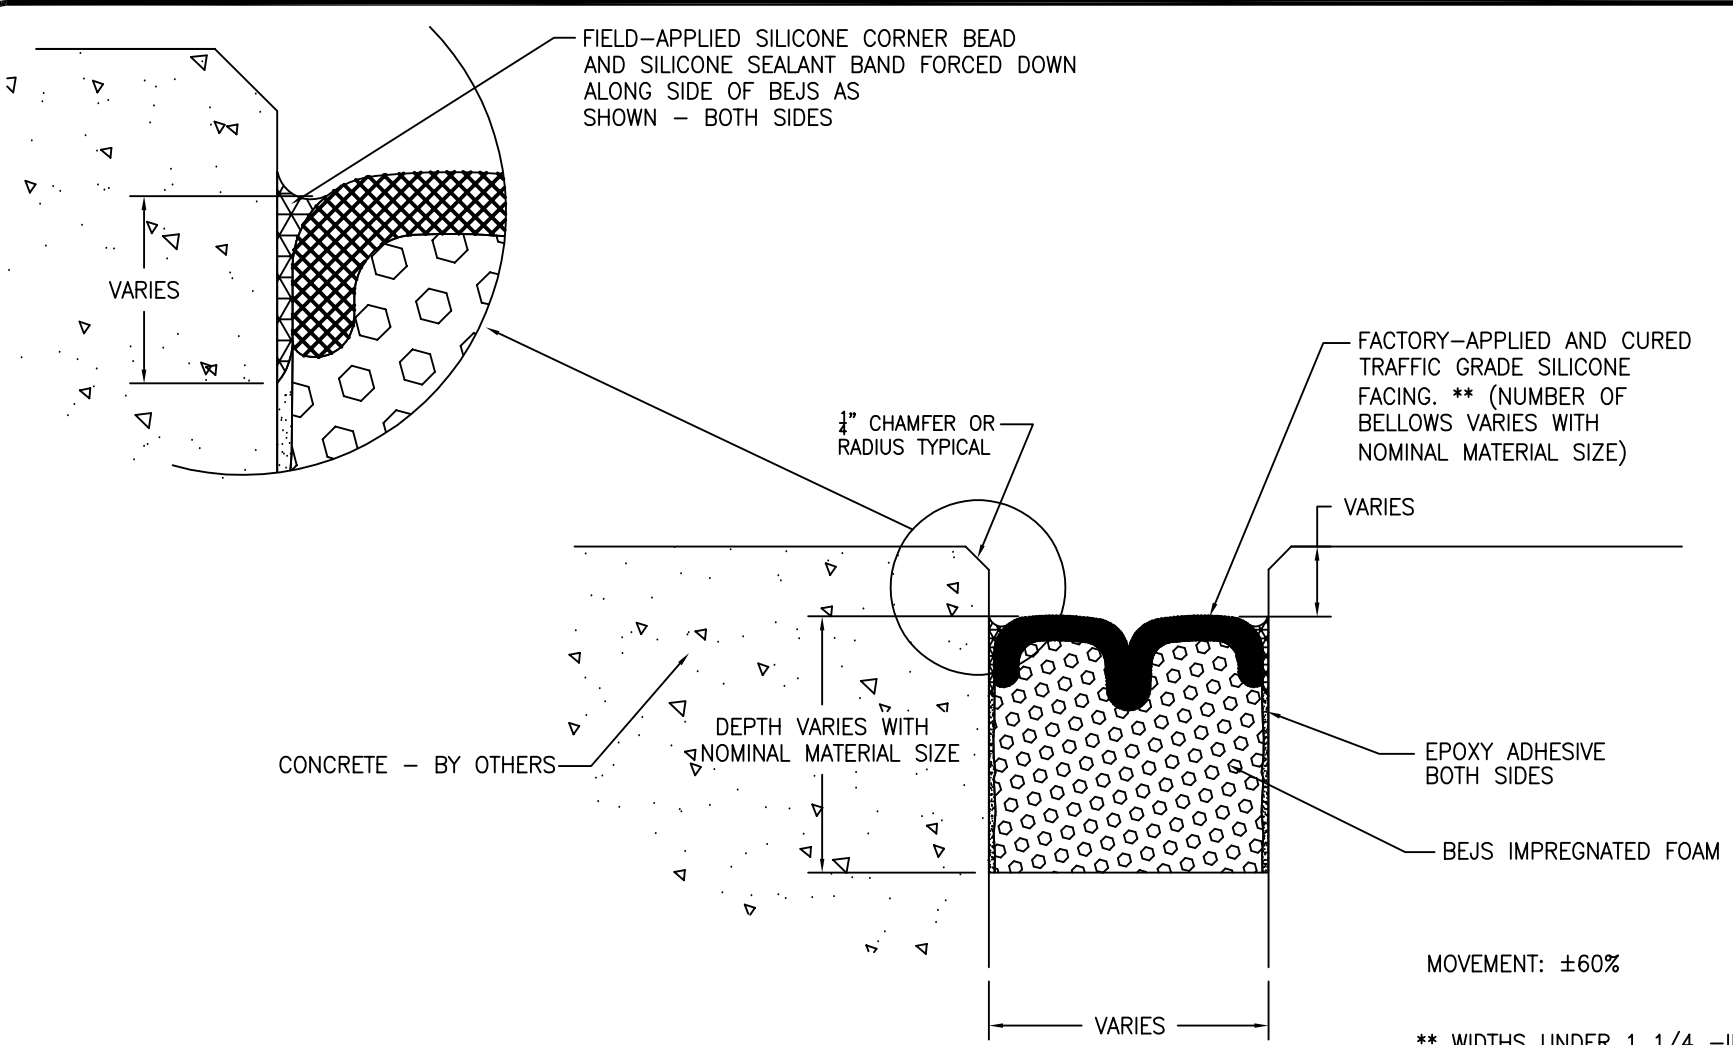

FACTORY-APPLIED AND CURED
TRAFFIC GRADE SILICONE
FACING. ** (NUMBER OF
BELLOWS VARIES WITH
NOMINAL MATERIAL SIZE)

1/4" CHAMFER OR
RADIUS TYPICAL

VARIES

CONCRETE - BY OTHERS

DEPTH VARIES WITH
NOMINAL MATERIAL SIZE

EPOXY ADHESIVE
BOTH SIDES

BEJS IMPREGNATED FOAM

MOVEMENT: ±60%

VARIES

** WIDTHS UNDER 1 1/4 -INCH (25mm)
HAVE A CONVEX SINGLE-BELLOWS SURFACE.
WIDTHS FROM 1 1/2 -INCH (25mm) TO
4-INCHES (100mm) HAVE A
DUAL-BELLOWS SURFACE.

BEJS DD CONCRETE TYPICAL

PROJECT NAME: -
PROJECT LOCATION: -
DRAWING DESCRIPTION: BEJS - Bridge E.J. System
DATE: 09/07/2023
MODEL: BEJS



Watson Bowman Acme
95 Pineview Drive Amherst, NY 14228
phone: (716) 691-7566 fax: (716) 691-9239
www.watsonbowmanacme.com



Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the Users own risk.

REVISION NO: -
SHEET NO: 1
DRAWING NO: -