

Notes:

DATE: 01/06/2021

- 1.) Please refer to the installation guide for information on splices, terminations, transitions, and additional details concerning adjacent construction.
- 2.) Minimum and maximum (Thermal) values shown on dimension chart are the limits for proper system performance. Unless otherwise noted, the dimension shown at "A" Mid is the recommended installation joint opening.
- 3.) If required, please consult with a WBA representative for the types and quantities of any chemical components needed for proper installation.
- 4.) Extended Movement: Value shown reflects the seal profiles capability and maximum opening during a seismic event.

MODEL: #8828X

ME-250 Slab to Slab Condition

Extended (#4) Installation Width Thermal Movement * Part Total Shear Model Number "A" @ Min "A" @ Mid "A" @ Max "A" @ Min "A" @ Max Movement Movement Movement 1 3/4"(44) ± 1/2"(13) 4 1/2" (114)

DIMENSION CHART (#2)

* (Standard Black Thermoplastic Seal)

ME-250 #8828X 1"(25) 1 1/4"(32) 1 3/4"(44) 3/4"(19) 2 1/2"(64)

PROJECT NAME: DRAWING DESCRIPTION Wabo®CreteMembrane (GenII) technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and

Watson Bowman Acme

Watson Bowman Acme 95 Pineview Drive Amherst, NY 14228 phone: (716) 691-7566 fax: (716) 691-9239 www.watsonbowmanacme.com

is used at the Users own risk.

MBCC GROUP

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All


DRAWING NO:

REVISION NO

SHEET NO:

() - DENOTES MILLIMETERS

S-8828X

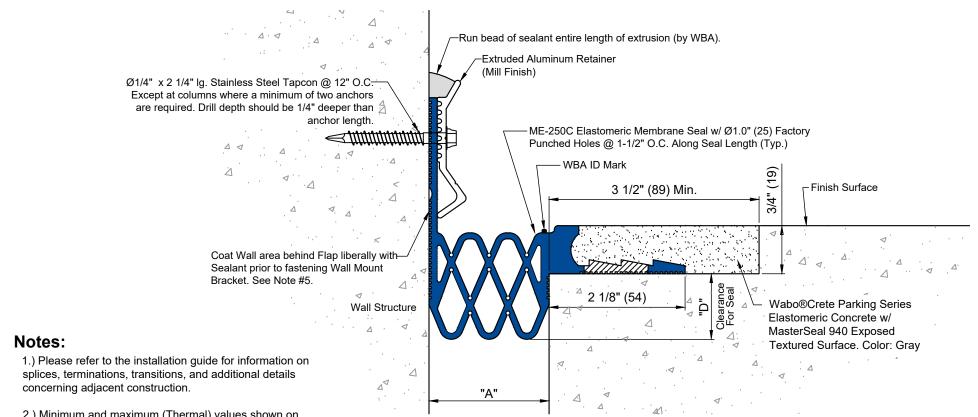

ME-250C Slab to Wall Condition

() - DENOTES MILLIMETERS

DIMENSION CHART (#2)											
Model	* Part	Installation Width			Thermal Movement		Total	"D"	Shear	Extended ^(#4)	
iviodei	Number	"A" @ Min	"A" @ Mid	"A" @ Max	"A" @ Min	"A" @ Max	Movement	U	Movement	Movement	
ME-250C	#8828XC	1"(25)	1 1/4"(32)	1 3/4"(44)	3/4"(19)	2 1/2"(64)	1 3/4"(44)	1"(25)	± 1/2"(13)	4 1/2" (114)	

* (Standard Black Thermoplastic Seal)

- 2.) Minimum and maximum (Thermal) values shown on dimension chart are the limits for proper system performance. Unless otherwise noted, the dimension shown at "A" Mid is the recommended installation joint opening.
- 3.) If required, please consult with a WBA representative for the types and quantities of any chemical components needed for proper installation.
- 4.) Extended Movement: Value shown reflects the seal profiles capability and maximum opening during a seismic event.
- 5.) Sealant Optional. Recommended when wall surfaces are rough or irregular.

PROJECT NAME:

DRAWING DESCRIPTION

DATE: 01/06/2021

Wabo®CreteMembrane (GenII)

MODEL: #8828XC

Watson Bowman Acme

Watson Bowman Acme 95 Pineview Drive Amherst, NY 14228 phone: (716) 691-7566 fax: (716) 691-9239 www.watsonbowmanacme.com

MBCC GROUP

SHEET NO:

DRAWING NO:


REVISION NO

S-8828XC

3

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and

is used at the Users own risk.

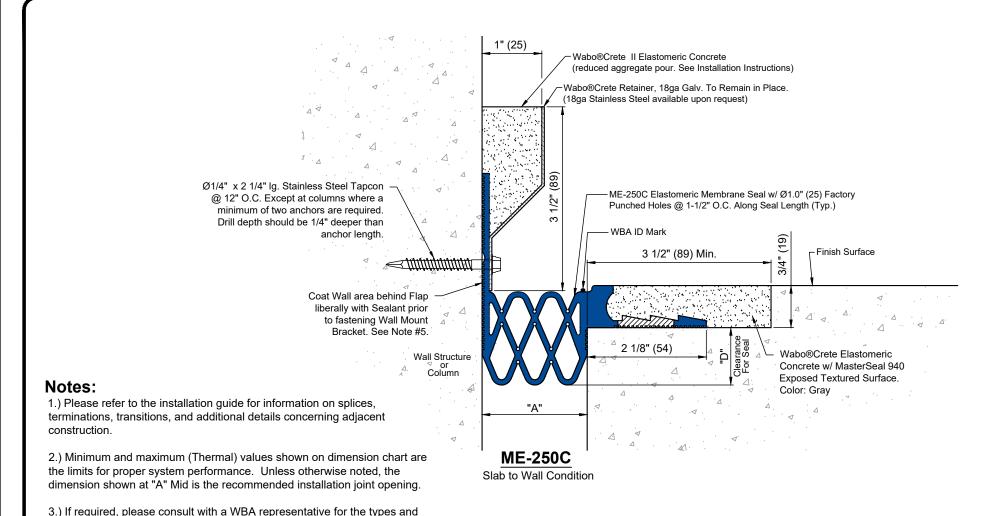

() - DENOTES MILLIMETERS

DIMENSION CHART (#2)											
Madal	* Part	Installation Width			Thermal Movement		Total	"D"	Shear	Extended ^(#4)	
Model	Number	"A" @ Min	"A" @ Mid	"A" @ Max	"A" @ Min	"A" @ Max	Movement	U	Movement	Movement	
ME-250C	#8828XC	1"(25)	1 1/4"(32)	1 3/4"(44)	3/4"(19)	2 1/2"(64)	1 3/4"(44)	1"(25)	±1/2"(13)	4 1/2" (114)	

* (Standard Black Thermoplastic Seal)

5.) Sealant Optional. Recommended when wall surfaces are rough or irregular. PROJECT NAME:

quantities of any chemical components needed for proper installation.

4.) Extended Movement: Value shown reflects the seal profiles capability

Watson Bowman Acme

Watson Bowman Acme 95 Pineview Drive Amherst, NY 14228 phone: (716) 691-7566 fax: (716) 691-9239 www.watsonbowmanacme.com

MBCC GROUP

SHEET NO:

DRAWING NO:

REVISION NO

S-8828XC

2

Wabo®CreteMembrane (GenII)

and maximum opening during a seismic event.

PROJECT LOCATION

DRAWING DESCRIPTION

DATE: 01/06/2021

MODEL: #8828XC

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the Users own risk.