
Notes:

- 1.) Please refer to the installation guide for information on splices, terminations, transitions, and additional details concerning adjacent construction.
- 2.) Minimum and maximum values shown on dimension chart are the limits for proper system performance. Unless otherwise noted, the dimension shown at "A" Mid is the recommended installation joint opening.
- 3.) The system is shipped in nominal standard lengths of 6.5ft (2 meters).
- 4.) Standard Color is Grey. Others available. contact your WBA Representative.



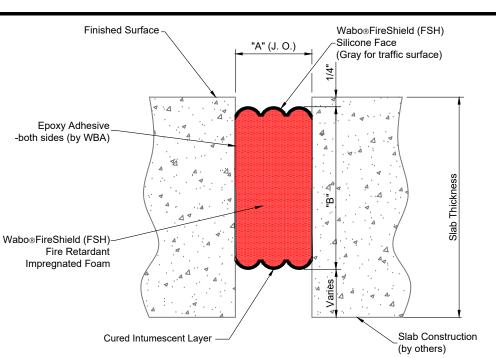

Wabo®FireShield 3Hr (FSH 25% Only) Detail

Size whe	n ordering	Slab to Slab Condition									
@ Mean T	emperature	NOT TO						ΓO SCALE		Part Number for Ordering (25% mvmt)	
"A" @ Mid.		Joint Opening "A"								3hr Rated @ 25% mvnt	3hr Rated @ 25% mvnt
Nominal Install J.O.		Min.		Max.		Total Mov.		System Depth "B"		Coated Both Side	Coated One Side
in	mm	in	mm	in	mm	in	mm	in	mm		
0.50	13	0.38	10	0.63	16	0.25	6	4.00	102	FSH 60209	FSH 60227
1.00	25	0.75	19	1.25	32	0.50	13	4.00	102	FSH 60215	FSH 60234
1.50	40	1.13	29	1.88	48	0.75	19	4.00	102	FSH 60219	FSH 60238
2.00	50	1.50	38	2.50	64	1.00	25	4.00	102	FSH 60222	FSH 60241
2.50	65	1.88	48	3.13	80	1.25	32	4.00	102	FSH 60224	FSH 60243
3.00	76	2.25	57	3.75	95	1.50	38	4.00	102	FSH 60226	FSH 60245
4.00	102	3.00	76	5.00	127	2.00	51	4.00	102	(not avail, in 4" size)	(not avail, in 4" size)
4.50	114	3.38	86	5.63	143	2.25	57	4.00	102	(not avail, in 4.5" size)	(not avail, in 4.5" size)

Other intermediate sizes are available up to 4.5" wide, contact WBA for details. Contact your WBA Representative with your special design needs.

PROJECT NAME:

PROJECT LOCATION

DRAWING DESCRIPTION

DATE: 08/01/2023

Wabo®FireShield 3 HR Rated

(Horiz.25% Mvnt)

MODEL: FSH



Watson Bowman Acme 95 Pineview Drive Amherst, NY 14228 phone: (716) 691-7566 fax: (716) 691-9239 www.watsonbowmanacme.com



SHEET NO:

DRAWING NO:

REVISION NO

A29888

3

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the Users own risk.