
Notes:

- 1.) Please refer to the installation guide for information on splices, terminations, transitions, and additional details concerning adjacent construction.
- 2.) Minimum and maximum values shown on dimension chart are the limits for proper system performance. Unless otherwise noted, the dimension shown at "A" Mid is the recommended installation joint opening.
- 3.) The system is shipped in nominal standard lengths of 6.5ft (2 meters).
- 4.) Standard Color is Grey. Other colors are available. Contact your WBA Representative.



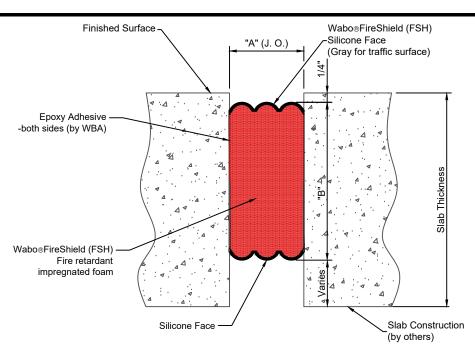

Wabo®FireShield 2 HR (FSH 50% Only) Detail Slab to Slab Condition

Size when ordering NOT TO SCALE Part Number for Ordering (50% mvmt) @ Mean Temperature 2hr Rated @ 50% mvnt "A" @ Mid. Joint Opening "A" 2hr Rated @ 50% mvnt Nominal Install J.O Min. Max. Total Mov. Coated Both Sides*** System Depth "B" Coated One Side in mm in mm in mm in mm in mm 0.50 0.63 0.25 13 0.38 10 16 6 4.00 102 FSH 60380 FSH 60392 25 0.75 19 1.25 32 0.50 13 102 FSH 60383 FSH 60395 1.00 4.00 1.50 40 1.13 29 1.88 48 0.75 19 4.00 102 FSH 60385 FSH 60397 50 1.50 38 2.50 64 25 FSH 60399 2.00 1.00 4.00 102 FSH 60387 32 2.50 65 1.88 48 3.13 80 1.25 4.00 102 FSH 60389 FSH 60401 3.00 76 2.25 57 3.75 95 1.50 38 4.00 102 FSH 60391 FSH 60403 102 51 4 00 3.00 76 5.00 127 2.00 4.00 102 (avail. In +37%/-43% only) (avail. In +37%/-43% only

Other intermediate sizes are available up to 4.5" wide, contact WBA for details. Contact your WBA Representative with your special design needs.

57

PROJECT NAME

PROJECT LOCATION

DRAWING DESCRIPTION

DATE: 08/01/2023

Wabo®FireShield 2 HR Rated (Horiz.50% Mvnt)

4.50

114

MODEL: FSH

3.38

Watson Bowman Acme

86

5.63

143

2.25

Watson Bowman Acme 95 Pineview Drive Amherst, NY 14228 phone: (716) 691-7566 fax: (716) 691-9239 www.watsonbowmanacme.com

4.00

102



(avail. In +37%/-43% only) (avail. In +37%/-43% only)

DRAWING NO:

SHEET NO:

REVISION NO

A29888

3

2

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the Users own risk.