


Wabo® Evazote UV

Low Density, Closed Cell, Cross-Linked Nitrogen Blown Joint Seal

Features	Benefits
<ul style="list-style-type: none"> • Versatile movement 	Can accommodate movement of 90% of its nominal width, allowing 60% compression and 30% tension. The seal can also accommodate up to 120% shear movement.
<ul style="list-style-type: none"> • Nitrogen Blown 	Profile minimizes dirt and debris in the joint opening. When compressed the center portion does not extend upward above the seals original height.
<ul style="list-style-type: none"> • Simplicity 	Minimal components and flexibility of seal allows for quick joint repairs and short traffic closures.
<ul style="list-style-type: none"> • Hydrostatic Applications 	Standard system can accommodate up to 10 feet of hydrostatic pressure.

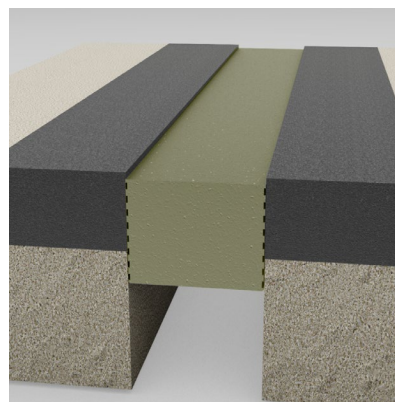

RECOMMENDED FOR:

- Sealing joints on bridges, and wastewater treatment facilities
- Repair and maintenance of existing joints
- Horizontal and vertical applications
- Expansion joints with varying joint widths.

DESCRIPTION:

Wabo® Evazote UV is preformed low density closed cell cross-linked ethylene vinyl acetate polyethylene copolymer nitrogen blown joint seal that is bonded into place with an epoxy adhesive. Wabo® Evazote is capable of accommodating movements and watertightness given variations in joint widths through compression and tension. The seal has a working ranging of 60% compression, 30% tension and 120% shear. The UV stability of Wabo® Evazote allows the seal to be resistant to abrasion, oxidation, oils, salt and other materials that are spilled on or applied to the surface. Grooves are placed along its edges to ensure and enhance its bond strength.

PACKAGING/COVERAGE:

- Maximum shipping lengths:

Width	Max Length
1" to 1.25"	100 ft
1.5625" to 4.375"	50 ft
4.6875" to 6.50"	25 ft

- Wabo® FoamSeal Bonder:


	Volume Container	
Part A	3 quarts	1 Gallon
Part B	1 quart	1 quart

Seal Depth		Adhesive Yield	
1"	25 mm	100 LF	30.4 m
2"	50 mm	50 LF	15.2 m
3"	75 mm	35 LF	10.7 m
4"	100 mm	25 LF	7.6 m

TECHNICAL DATA:

Design Information

The design of the seal shall be capable of accommodating movement and variations in joint widths through compression and tension of its shape. Grooved sidewalls shall be 1/8" (3mm) wide by 1/8" deep (3mm) and spaced between 1/4" (6mm) to 1/2" (13mm) apart and run along the entire length of the bond surfaces of the seal to ensure an effective and quality surface for adhesion.

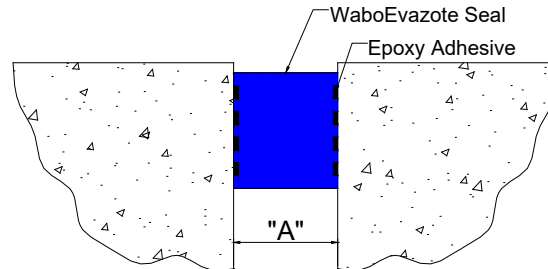

Movement Table

SEAL SIZE		JOINT OPENING "A" @ MIDRANGE TEMPERATURE		JOINT OPENING "A" RANGE					
				MIN.		MAX.		TOTAL	
MODEL NO.	Width x Height	in	mm	in	mm	in	mm	in	mm
EVAZOTE 30602	1" x 1"	0.75	19	0.40	10	1.30	33	0.90	23
EVAZOTE 30605	1.25" x 2"	1.00	25	0.50	13	1.63	41	1.13	29
EVAZOTE 30608	1.5625" x 2"	1.25	32	0.63	16	2.03	52	1.40	36
EVAZOTE 30609	1.72" x 2"	1.38	35	0.75	19	2.25	57	1.50	38
EVAZOTE 30610	1.875" x 2"	1.50	38	0.75	19	2.43	62	1.68	43
EVAZOTE 30616	2.1875" x 2"	1.75	44	0.88	22	2.85	72	1.97	50
EVAZOTE 30622	2.5" x 2"	2.00	51	1.00	25	3.25	83	2.25	57
EVAZOTE 30649	2.8125" x 2.5"	2.25	57	1.12	28	3.65	93	2.53	64
EVAZOTE 30631	3.125" x 2.5"	2.50	64	1.25	32	4.07	103	2.82	72
EVAZOTE 30634	3.4375" x 3"	2.75	70	1.38	35	4.47	114	3.09	78
EVAZOTE 30638	3.75" x 2.5"	3.00	76	1.50	38	4.88	124	3.38	86
EVAZOTE 30641	4.0625" x 3"	3.25	83	1.62	41	5.28	134	3.66	93
EVAZOTE 30643	4.375" x 3"	3.50	89	1.75	44	5.69	145	3.94	100
EVAZOTE 30646	4.6875" x 3"	3.75	95	1.87	47	6.08	154	4.21	107
EVAZOTE 30650	5" x 4"	4.00	102	2.00	51	6.50	165	4.50	114
EVAZOTE 30653	5.375" x 4"	4.25	108	2.15	55	6.98	177	4.83	123

For variations along the same joint line please contact your Sales Representative.

PHYSICAL PROPERTIES:

Seal Profile - Wabo®Evazote UV profile is a joint seal that consists of an impermeable closed cell, crosslinked ethylene vinyl acetate, low density polyethylene copolymer nitrogen blown resilient and non-extrudable foam material with a UV stabilizer.

PHYSICAL PROPERTIES	ASTM TEST METHOD	REQUIREMENTS
Elongation at Break	D 3575	255% +/- 25%
Tensile Strength	D 3575	115 psi +/- 21
Compression Recovery	T42 *	87% +/- 3%
Compression Set	D 3575 **	10%
	T42 ***	9%
Weathering/ Deterioration	D 3575	No deterioration
Tear Resistance	D 624	15 lbs/in +/- 20%
Density	D 3575	2.7 – 3.2
Water Absorption	D 3575	0.02 lbs/ ft3
Specimen Extrusion	D 3575 ****	<0.25" (free side)
* - 50% compression for 22hrs at 73°F, 1/2 hr recovery		
** - 50% compression for 22hrs at 73°F, 2 hr recovery		
*** - 50% compression for 22 hrs at 73°F, 24 hr recovery		
**** - 60% compression of original thickness with 3 retained sides		

Adhesive - Wabo®FoamSeal Bonder is a 100% solids, two component moisture insensitive modified epoxy adhesive which meets ASTM C-881 Type I and II Grade 2 Class B&C.

PHYSICAL PROPERTIES	PART A	PART B	MIXED
Color	White	Carmel	Beige
Shelf Life	2 yrs	2 yrs	N/A
Mixing ratio (vol:vol)	3 parts	1 part	3:1
Specific Gravity	1.47	1.15	N/A
Density	12.2 lbs/gal	9.6 lbs/gal	N/A
Viscosity	22,000 cps	33,000 cps	26,000 cps
Pot Life	N/A	N/A	32-36 minutes
Initial Set (@77°F)	N/A	N/A	1.5-2 hours
Initial Cure (@77°F)	N/A	N/A	8-12 hours
Full Cure (@77°F)	N/A	N/A	7 days

PHYSICAL PROPERTIES	ASTM Test Method	REQUIREMENTS
Compressive Strength	White	7,000 psi (48 MPa)
Tensile Strength	2 yrs	3,500 psi (24 MPa)
Elongation at Break	N/A	3%- 5%
Shore D Hardness	N/A	75
Water Absorption	N/A	0.25%
Bond Strength	N/A	430 psi (3 MPa)

APPLICATION:

INSTALLATION SUMMARY:

- **Newly placed concrete** - The concrete joint interface must be dry and clean (free of dirt, coatings, rust, greases, oil and other contaminants), sound and durable. New concrete must be cured (minimum of 14 days).
- **Aged Concrete** - The blockout should be of sound concrete. Loose, contaminated, weak, spalled, deteriorated concrete must be removed to sound concrete and repaired prior to placement. Any spalling, voids or structural cracking at the joint interface must be repaired.
- **Steel:** steel substrates should be sound, steel surfaces must be abrasive blasted SP-10 near white, immediately prior to installation.
- Measure the joint opening width. The nominal width of the seal should be 25% larger than the joint opening.
- Measure and cut to exact length needed for continuous joint, being careful not to pull or stretch the seal.
- Tape off the deck or area surrounding where epoxy will be used to assist with clean up.

- When mixing epoxy do not split units. Apply mixed Wabo®FoamSeal Bonder by hand with rubber gloves. Coat both sides of the joint opening. Apply enough material to fill the grooves on each side of the seal.
- Use Wabo® Concrete Cleaner to remove excess epoxy off the seal
- The seal should be installed ¼” below grade.
- Clean all excess epoxy from the edges of the joint opening and from the top of the seal as soon as it is pushed into the desired depth. **DO NOT allow the epoxy to cure before removing it.**

FOR BEST RESULTS:

- Repair any spalls, voids, or structural cracking at the joint interface.
- Do not install if the joint’s anticipated movement will exceed the seal’s movement range.
- Do NOT allow any of the components to freeze prior to installation. Store all components out of direct sunlight in a dry location between 50°F (10°C) and 90°F (32°C). DO NOT store in high humidity.
- Shelf life of the Wabo®FoamSeal Bonder is 2 years

- Periodically inspect the applied material and repair localized areas as needed. Consult a Watson Bowman Acme representative for additional information.
- Make certain the most current version of the product data sheet is being used. Please consult the website (www.watsonbowmanacme.com) or contact a customer service representative.
- Proper application is the responsibility of the user. Field visits by Watson Bowman Acme personnel are for the purpose of making technical recommendations only.

Options Consult with WBA sales rep for epoxy alternatives (i.e. WaboGel Adhesive)

RELATED DOCUMENTS:

- Wabo®Evazote UV SDS
- Wabo®Evazote UV Specification
- Wabo®Evazote UV Sales Drawings
- Wabo®Evazote UV Installation Procedure
- WaboEvazote Fact Sheet
- Wabo Foam Bonder SDS

LIMITED WARRANTY:

Watson Bowman Acme warrants that this product conforms to its current applicable specifications. WATSON BOWMAN ACME MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. The sole and exclusive remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the sole option of Watson Bowman Acme. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL WATSON BOWMAN ACME BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Other warranties may be available when the product is installed by a factory trained installer. Contact your local Watson Bowman Acme representative for details. The data expressed herein is true and accurate to the best of our knowledge at the time published; it is, however, subject to change without notice.

WaboEvazoteUV_0125