


# Wabo®StripSeal

Armored small movement expansion joint system

Features	Benefits
<ul style="list-style-type: none"> <li>• Flexible applications</li> </ul>	Variable steel extrusions provide greater flexibility to accommodate any new construction or repair project condition
<ul style="list-style-type: none"> <li>• Versatile movement</li> </ul>	Accommodates various expansion joint movements and configurations.
<ul style="list-style-type: none"> <li>• Heavy duty</li> </ul>	Accommodates heavy duty loads and bridge deflections.
<ul style="list-style-type: none"> <li>• Watertight</li> </ul>	Continuous sealing element prevents water from leaking through the expansion joint opening

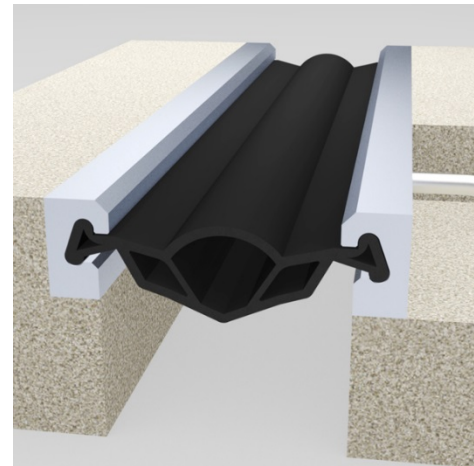

## DESCRIPTION:

Wabo®StripSeal expansion joint system consists of an elastomeric gland mechanically locked between two steel edge members providing a superior watertight sealing system. The rugged design of the WaboStripSeal system can easily accommodate the high loads of vehicular traffic while effectively sealing expansion joints in bridges and structures with movements up to five inches. WaboStripSeal systems can be manufactured to accommodate a variety of field configurations along with multidirectional movements. The WaboStripSeal has been engineered so that the neoprene seal can be inserted either prior to or after the securing of the steel shapes to the superstructure. Machined Steel shapes maximize seal installability and minimize manufacturing tolerance associated with overall Steel shape manufacture.


## RECOMMENDED FOR:

- Sealing joints on bridges and parking decks
- Skewed joints
- High impact and repetitive loading conditions
- Expansion joint applications with a maximum movement of 5 inches
- New construction or repair and maintenance of existing expansion joint systems

## PACKAGING/COVERAGE:

- Steel extrusions are shipped in standard 20 foot lengths. Other lengths available, contact WBA for details.
- Rubber seals are cut to length and shipped on pallets per limitations of shipping methods
- Wabo®PrimaLub – 1 gal container
  - Coverage = lineal ft x 0.00361

**TECHNICAL DATA:**

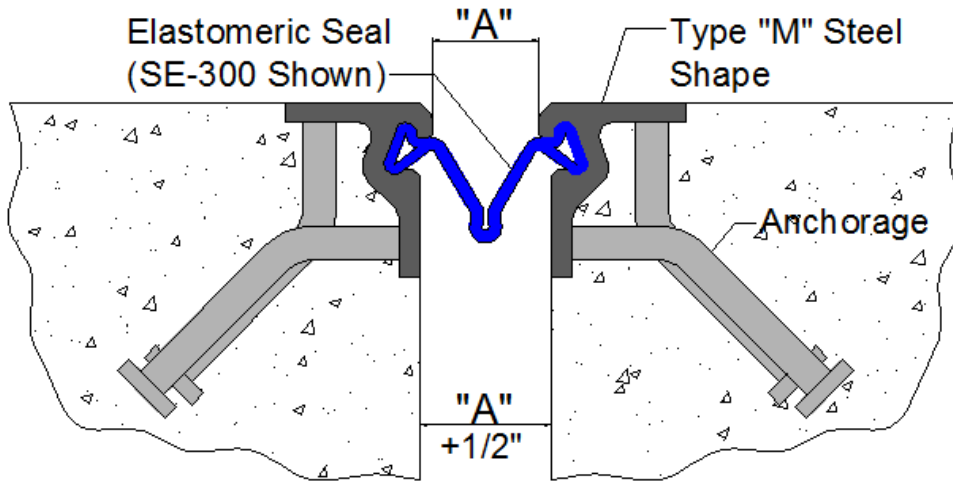

**Movement Table**

Model Number	Movement Range "A"						Min. Install Width	
	Min.		Max.		Total		in	mm
	in	mm	in	mm	in	mm		
SE-300	0.00	0	3.00	76	3.00	76	1.50	38
SE-400	0.00	0	4.00	102	4.00	102	1.50	38
SE-500	0.00	0	5.00	127	5.00	127	2.00	51
EFE-400	0.50	13	4.50	114	4.00	102	2.00	51
SE-800	0.50	13	8.50	216	8.00	203	2.00	50

Consult your WBA Representative for factory molded horizontal changes, severe skews or joint intersections.


**Elastomeric Gland**

The WaboStripSeal system utilizes two standard glands; SE and EFE series. The elastomeric gland of the WaboStripSeal system can handle movements up to 5 inches (127mm). Several sizes of the elastomeric gland offer solutions to a wide range of field applications. The elastomeric glands can be factory molded for horizontal changes, severe skew, or joint intersections. All glands are produced from neoprene rubber.



### Steel Edge Members

The WaboStripSeal system incorporates the use of six standard profile configurations. See details for profile configurations. All steel edge members are machined from ASTM A588 or A36 grade steel. Available in coated or uncoated finishes. Customers need to specify options when ordering.

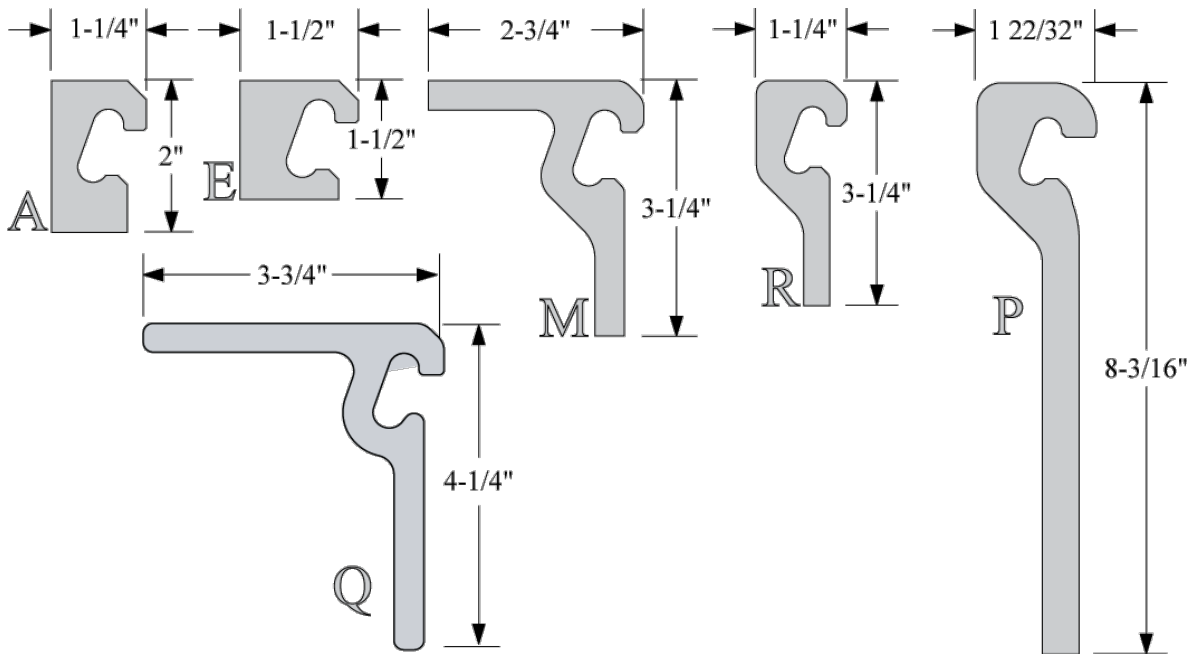

### Physical Properties (Elastomeric Gland)

PHYSICAL PROPERTY	ASTM TEST METHOD	REQUIREMENTS
Tensile Strength, min	D 412	2,000 psi (13.8 Mpa)
Elongation at Break, min	D 412	250%
Hardness, Shore A	D 2240	55 +/- 5
Oven Aging, 70 hrs. @		
Tensile, max loss	D 573	20%
Elongation, max loss		20%
Change in Hardness		0 to 10 pts.
Oil Swell, 70 hrs. @ 212°F(100°C)		
Weight Change, max	D 471	45%
Ozone Resistance		
70 hrs. @ 104°F(40°C)	D 1149	no cracks
Low Temperature Stiffening	D 2240	0 to +15



## INSTALLATION SUMMARY:

- If the system is to be installed in sections, special care should be taken to the field weld details on shop drawings.
- The WaboStripSeal joint system is lifted and lowered into final position. The steel edge members are suspended into the blockout utilizing adjustable leveling devices.
- Before securing or casting the system to the structure, the joint opening of the system should be adjusted to the proper ambient temperature.
- Complete all bolted or welded connections to the superstructure. When casting the joint into the structure, proper compaction of concrete around the system is required.
- The neoprene elastomeric gland should be field installed in continuous lengths spanning the entire roadway width. WaboPrimaLub adhesive is brushed into the full perimeter of the gland cavity on the steel edge member prior to actual gland installation.
- Clean all excess adhesive from the edges of the joint opening and from the top of the seal as soon as possible.

## OPTIONS/EQUIPMENT:

- Elastomeric gland installation tool, contact WBA for details.
- Certified welder to be utilized for field welding of sections.

## LIMITED WARRANTY:

Watson Bowman Acme Corp. warrants that this product conforms to its current applicable specifications. WATSON BOWMAN ACME CORP. MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. The sole and exclusive remedy of Purchaser for any claim concerning this product, including, but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is the replacement of product or refund of the purchase price, at the sole option of Watson Bowman Acme Corp. Any claims concerning this product shall be submitted in writing within one year of the delivery date of this product to Purchaser and any claims not presented within that period are waived by Purchaser. IN NO EVENT SHALL WATSON BOWMAN ACME CORP. BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDES LOSS OF PROFITS) OR PUNITIVE DAMAGES. Other warranties may be available when the product is installed by a factory trained installer. Contact your local Watson Bowman Acme representative for details. The data expressed herein is true and accurate to the best of our knowledge at the time published; it is, however, subject to change without notice.

## FOR BEST RESULTS:

- Install when concrete substrate is clean, sound, dry, and cured (14 day minimum).
- Do not install if the joint's anticipated movement will exceed the system's movement range.
- Protect the work area with appropriate plastic sheeting.
- Minimize splice points by installing seals in longest possible continuous lengths.
- Do not allow any of the components to freeze prior to installation. Store all components out of direct sunlight in a clean, dry location between 50°F and 90°F.
- Shelf life of chemical components is 1 year.
- Periodically inspect the applied material and repair localized areas as needed. Consult a Watson Bowman Acme representative for additional information.
- Make certain the most current version of the product data sheet is being used. Please consult the website ([www.watsonbowmanacme.com](http://www.watsonbowmanacme.com)) or contact a customer service representative.
- Proper application is the responsibility of the user. Field visits by Watson Bowman Acme personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the jobsite.

## RELATED DOCUMENTS:

- Material Safety Data Sheets
- WaboStripSeal Specification
- WaboStripSeal Sales Drawings
- WaboStripSeal Installation Procedure

## WaboStripSeal\_0321